

**PVC Screens** 

2

## PVC Curtain Strip - Round Edged for Safety

### Sizes, Uses & Grade Availability

Size	Use (Traffic, Opening Size)	-0°	+0°
Clear	Clear	,	,
305 x 0.5	Wavespan (Reinforced) light weight, Pedestrian, Privacy.	<b>√</b> ,	√,
100 x 2.0 Clear	Pedestrain. Small internal openings.	√,	√,
150 x 3.0 Clear	Pedestrian / Fork - Lifts. Med openings.	√,	√,
200 x 2.0 Clear	Pedestrian / pallet lifters. Med openings.	√,	√.
200 Rib Clear	Pedestrian / Fork - Lifts. Med external openings.	1	√.
200 x 3.0 Clear	Pedestrian / Fork - Lifts. Med external openings.	N/A	1
200 x 4.0 Clear	Heavy Fork - Lifts. Med openings, below - 20o C. (internal)	√.	N/A
300 x 3.0 Clear	Vehicular, Large openings.	1	1
300 Rib Clear	Heavy Fork - Lifts. Large openings, wind.	1	1
300 x 5.0 Clear	Heavy Fork - Lifts. Large openings, below - 20o C.	1	N/A
400 x 2.0 Clear	Internal Partitioning. (temp, draft control)	N/A	1
400 x 4.0 Clear	Heavy Vehicular. Large external openings.	1	1
400 x Rib Clear	Aggressive Vehicular usage. Large exposed openings.	N/A	1
Colours	Colours	i de la	Ú,
100 x 2.0 Green	(Translucent) Privacy, Marker strips.	N/A	√.
200 x 2.0 Red	Marker strips.	1	√.
300 x 2.0 Green	Welding strips.	N/A	√.
300 x 2.0 Black	Light proof strip. Portals / internal screens.	N/A	1
300 x 3.0 Red	Marker strips.	1	1

N/B - Indicates stockline (normally available ex stock)


- indicates not available. Ex stock (may be available on indent)

Grades

-0o (sub-zero) for temperatures between - 40 oC & 0 oC (internal use only) +0o (zero-plus) for temperatures between 0 oC & +60 oC (Contains an ultra - violet black)

Roll Length Colours = 50m (Rib strip - 45m) = Other colours available on request = Other sizes available on indent Sizes

#### Subject To Change Without Notice

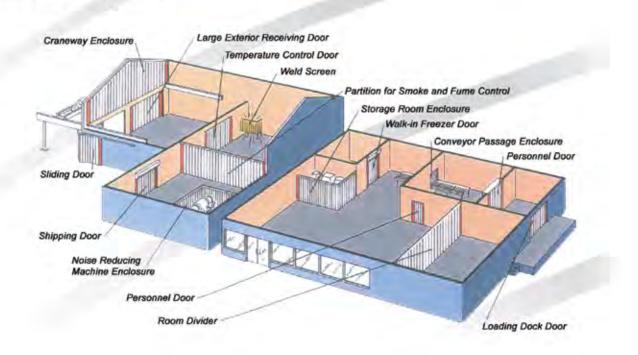

# **PVC Screens**



Reduces heat or cold air loss

By opening only wide enough to let a person or vehicle through and then closing automatically.

Restricts movement of air

Such as dust, dirt, smoke, fumes and drafts.

Admits light, saves time

Transparency provides excellent visibility for through traffic. No delays while doors are opened or closed

Isolates noisy machinery

And equipment, work stations and loading docks from other work areas.

Increased employee comfort

By keeping temperature and humidity under control.

Provides bird and flying insect control Outside or between different work areas.

Strong and durable

Top quality PVC material features heavy duty strength and tear resistance for long service life.

Minimum maintenance


Wipes clean easily and strips can be replaced independently if required.

Easy to install

No special labour and tools needed for installation. Shipped knocked down, ready to install.

# **Header Rails**

The header rail is selected to suit the weight and construction of the curtain, the intended method of fixing and environmental factors.

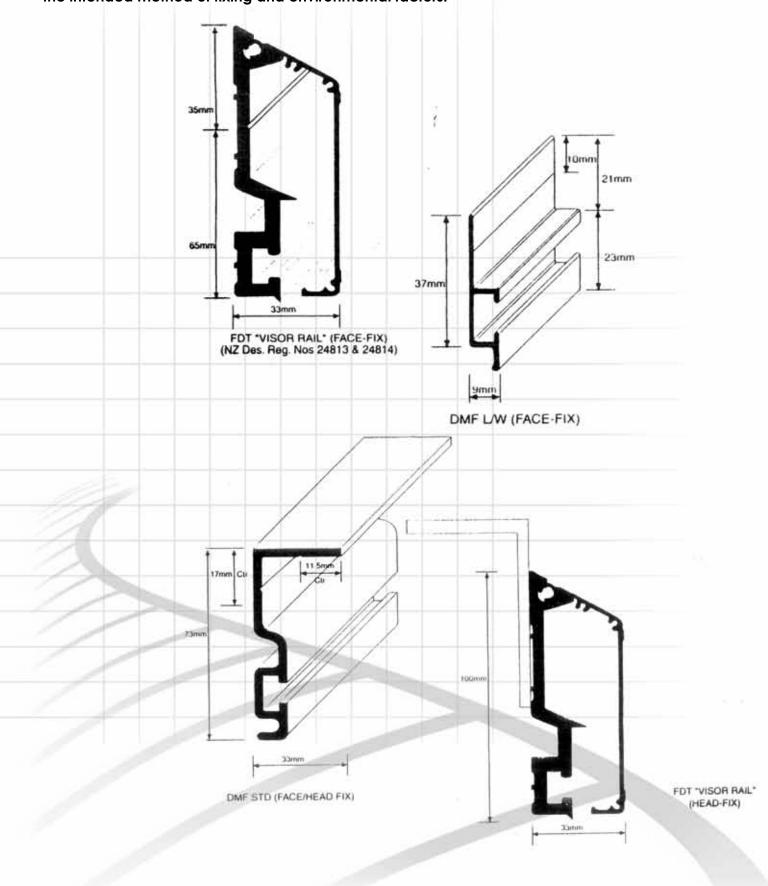

### Flexible Curtains

Skellerup Flexible Strip Curtains form an environment seal which opens to the size of the equipment or person passing through.

The clear flexible PVC strips readily part upon contact and fall beck into place once pass-through has been completed.

### Some Applications

Atmosphere Control

Freezer Doors

Craneway Openings

Warehouse Partitioning

Welding Bays

Conveyor Portholes

Pest Control

Fume Control

Thermal Dividers

### Some Features

Safety - High visibility

**Energy Management** 

Quick, Easy Installation

Low Maintenance

Light Control

Individual Panels - (Easily replaced, cleaned or changed),


Aluminium Header - (Corrosion Free).

High Strength Alloy

No Limits - (To Height or Width)


Easy on Traffic & People

Non Toxic - (Grades available)





Strip overlap to suit application.



Fixed or Sliding Suspension Systems.

Automatic or Manual.



AMBIENT & FREEZER GRADES (Clear)



WELD STRIP (Bronze/Green)



COLOURED BUFFER & MARKER STRIPS (Multiple Colour Choice)



PROFILED STRIP (Clear) Heavy Duty. Increased Strength. Less Scratching.