

5.

Rubber Products



Speciality Sheet Rubber

For Industry

Pure Gum Rubber

Natural Rubber

Neoprene

Hypalon

E.P.D.M.

Silicone

Butyl

Nitrile


Viton

S.B.R.

General Mouldings

SUCTION CAPS

| | | | | | | |
|--------|-------|----------------|-----------------|--------|-------|-----------------|
| IME131 | S/Cup | Roof Car Black | Ø75mm | IME203 | S/Cup | 32mm Bolt Nut |
| IME132 | S/Cup | Roof Car White | Ø75mm | IME204 | S/Cup | 32mm 3.2mm Hole |
| IME133 | S/Cup | Roof Car Black | Ø75mm with bolt | IME237 | S/Cup | 19mm 4.2mm Hole |
| IME202 | S/Cup | 32mm | | IME222 | S/Cup | 63mm Bolt Nut |
| | | | | IME223 | S/Cup | 63mm 4mm Hole |



MOULDED WASHERS

| | | |
|--------|--------------------|--------------------------|
| IME361 | Washer Steel Guard | 57mm OD x 1mm ID x 6.5mm |
|--------|--------------------|--------------------------|



ROPE TENSIONERS

| | | |
|--------|----------------|------------|
| IME357 | Rope Tensioner | 150mm Long |
|--------|----------------|------------|



HOT WATER CYLINDER GASKETS

| | | |
|--------|---------------------------|---------|
| IPG320 | Gasket Hot Water Cylinder | 26mm ID |
| IPG321 | Gasket Hot Water Cylinder | 32mm ID |
| IPG322 | Gasket Hot Water Cylinder | 38mm ID |



BUSHES

| | | |
|--------|--------------------------|--------------------------|
| ICC580 | Bush Pin Coupling Type A | 19mm L x 22 OD x 12.5 ID |
| ICC581 | Bush Pin Coupling Type B | 22mm L x 28 OD x 15 ID |
| ICC582 | Bush Pin Coupling Type C | 29mm L x 35 OD x 19 ID |
| ICC583 | Bush Pin Coupling Type D | 37mm L x 35 OD x 19 ID |



ICC583

RUBBER BUNGS $D1 \times D2 \times L$

| | | | | | |
|--------|----------|--------------------|--------|----------|--------------------|
| IMJ114 | Bung Rub | 10.3 x 8.7 x 18.2 | IMJ395 | Bung Rub | 50.8 x 47.6 x 50.8 |
| IMJ053 | Bung Rub | 25.4 x 19 x 38.1 | IMJ176 | Bung Rub | 69.9 x 57.2 x 63.5 |
| IMJ205 | Bung Rub | 88.9 x 63.5 x 95.3 | IMJ219 | Bung Rub | 101.6 x 76.2 |



SEED CLEANING BALLS

| | | |
|--------|--------------------|------|
| IMJ010 | Seed Cleaning Ball | 25mm |
| IMJ325 | Seed Cleaning Ball | 35mm |
| IMJ665 | Seed Cleaning Ball | 51mm |



DOOR STOPS

| | | |
|--------|--------------------------|--------------------|
| IMD317 | Buffer Door Stop Black | 25mm |
| IMD367 | Door Stop Twin SC Packed | |
| IMD368 | Door Stop W/Out Screw | |
| DMD100 | Door Stop Small Grey | 29mm OD x 6.3mm ID |
| DMD115 | Door Stop Large Grey | 38mm OD x 6.5mm ID |



FOWL PLUCKING FINGERS

| | | | |
|--------|----------------------|-------------------|----------------------|
| IMF341 | Fowl Plucking Finger | Narr Ribbed 48 HD | 105mm long x 21 Ribs |
| IMF343 | Fowl Plucking Finger | Feathertop 60 HD | 104mm long x 13 Rib |



General Mouldings

WHEEL DIMENSIONS AND LOAD DEFLECTIONS

| Part Number | Wheel Dimensions | | Journal | | Load in Kilograms Deflection in mm | | | | |
|-------------|------------------|-----|----------------|------|------------------------------------|-----|-----|------|------|
| | Dia x Width | | Diameters/Bore | | 90 | 180 | 270 | 365 | 450 |
| IWM410 | 76mm x 32mm | 3" | 8mm | | | | | | |
| IWM413 | 102mm x 38mm | 4" | 12.5mm | 1/2" | 2.4 | 4 | 5.6 | 7.1 | 7.9 |
| IWM414 | 152mm x 38mm | 6" | 19.1mm | 3/4" | 3.2 | 7.1 | 9.5 | 11.1 | 11.9 |
| IWM415 | 204mm x 48mm | 8" | 25.4mm | 1" | 2.4 | 4 | 7.1 | 7.1 | 7.9 |
| IWM416 | 254mm x 48mm | 10" | 25.4mm | 1" | 2.4 | 4 | 7.9 | 7.9 | 9.7 |
| IWM418 | 305mm x 50mm | 12" | 25.4mm | 1" | 2.4 | 4.8 | 7.1 | 7.1 | 7.9 |



MUSHROOM VALVE

IPV100 Mushroom Valve
72mm OD x 19.5mm OD(2) x 33mm High



COLUMN FENDERS

PFA324 Column Fenders
Overall 190mm x 190mm x 500mm long



ANTI-RATTLE BUTTONS Grommet type

| | | | | | | | |
|---------|-------------------|-------|----|---------|-------------------|--------|-----|
| IMA 137 | Antirattle Button | 3.2mm | DH | IMA 135 | Antirattle Button | 6.3mm | DH |
| IMA 131 | Antirattle Button | 7mm | FH | IMA 138 | Antirattle Button | 6mm | SPH |
| IMA 132 | Antirattle Button | 6.4mm | FH | IMA 140 | Antirattle Button | 6.7mm | DH |
| IMA 133 | Antirattle Button | 6.4mm | FH | IMA 136 | Antirattle Button | 12.5mm | FH |
| IMA 134 | Antirattle Button | 6mm | FH | | | | |



STABILISER BLOCKS

| | | | | | |
|---------|------------------|-------------|---------|------------------|---------------|
| IAR 272 | Stabiliser Block | 46mm Length | IAR 273 | Stabiliser Block | 54.8mm Length |
|---------|------------------|-------------|---------|------------------|---------------|



TAIL BOARD BUFFERS

IMD 333 Buffer Tailboard
152.4mm long x 63.5mm wide x 43mm thick



TANK CAPS

| | | | | | |
|---------|----------|-----------|---------|----------|-----------|
| IAR 261 | Tank Cap | 32mm ID | IAR 159 | Tank Cap | 57.2mm ID |
| IAR 262 | Tank Cap | 38mm ID | IAR 082 | Tank Cap | 62.5mm ID |
| IAR 157 | Tank Cap | 44.5mm ID | IAR 667 | Tank Cap | 75mm ID |
| IAR 158 | Tank Cap | 50mm ID | | | |



General Mouldings

WALKSTICK/CRUTCH TIPS ID

| | | | | | |
|--------|----------------------|--------|--------|----------------------|--------|
| IMK390 | Walkstick/Crutch Tip | 19mm S | IMK381 | Walkstick/Crutch Tip | 28mm F |
| IMK391 | Walkstick/Crutch Tip | 22mm S | IMK382 | Walkstick/Crutch Tip | 32mm F |
| IMK394 | Walkstick/Crutch Tip | 25mm S | | | |



CHAIR TIPS ID

| | | | | | | | |
|--------|-----------|--------|-------|--------|-----------|------|-------|
| DMC105 | Chair Tip | 11.5mm | Black | DMC145 | Chair Tip | 19mm | Black |
| DMC120 | Chair Tip | 16mm | Grey | DMC161 | Chair Tip | 22mm | Black |
| DMC125 | Chair Tip | 16mm | Black | DMC170 | Chair Tip | 25mm | Grey |
| DMC140 | Chair Tip | 19mm | Grey | DMC175 | Chair Tip | 25mm | Black |



STICK TIPS

| | | | | | | | |
|--------|-----------|------|-------|--------|-----------|------|-------|
| DMS110 | Stick Tip | 16mm | Black | DMS130 | Stick Tip | 22mm | Grey |
| DMS115 | Stick Tip | 16mm | Grey | DMS135 | Stick Tip | 25mm | Grey |
| DMS100 | Stick Tip | 19mm | Black | DMS125 | Stick Tip | 22mm | Black |
| DMS105 | Stick Tip | 19mm | Grey | | | | |



TOILET SEAT BUFFERS ID

| | | | | | | | |
|--------|--------------------|------|-------|--------|--------------------|--------|-------|
| DMB100 | Buffer Toilet Seat | 22mm | Black | DMB110 | Buffer Toilet Seat | 22mm | Grey |
| DMB105 | Buffer Toilet Seat | 22mm | White | IMD244 | Buffer Toilet Seat | 14.7mm | Black |



BUFFERS

| | | | |
|--------|--------|-------|-----------------------------------|
| IMD061 | Buffer | Black | 49mm High, 42mm O/D, 9.5 UNF Stud |
|--------|--------|-------|-----------------------------------|



SHOCK ABSORBER BUSH

| | | | |
|--------|---------------------|-------|----------------------------------|
| IAB065 | Shock Absorber Bush | Black | 2.5mm dia. x 10mm ID x 19mm long |
|--------|---------------------|-------|----------------------------------|



AUTOMOTIVE/INDUSTRIAL ANTI-VIBRATION MOUNTS


Rubber is a most efficient medium for the damping of vibration. When bonded to metal surfaces it becomes a robust and reliable shock absorber which eliminates, absorbs or reduces unwanted vibrations and their resultant noises in all types of machinery including stationary and mobile engines. An example is the modern car which uses rubber to metal bonded components for engine mountings, road shock absorbers and in many other ways to ensure smooth riding, silent performance.

Refrigerator compressors, washing machines and other domestic appliances also utilize unobtrusive anti-vibration rubber mountings. The feature of our rubber to metal bond is its strength. Test bond strength up to 1000 psi (6900 kPa) in shear and 200 lb (900 N) and upward may be handled in compression. Anti-vibration devices can be designer to control and insulate vibration travelling in several directions.

The advantages of our units as compared with other types are:

- (1) Simplified design and application.
- (2) Cost effective.
- (3) Smooth silent operation
- (4) No maintenance or lubrication required.
- (5) Complete insulation.

| | | | |
|--------|----------------------|---------|--|
| IMH290 | Anti-vibration Mount | 25mm OD | 8mm stud each end – 20mm Long |
| IMH224 | Anti-vibration Mount | 35mm OD | 9.5mm stud each end – 25mm Thick, 22mm long |
| IMH357 | Anti-vibration Mount | 51mm OD | 30mm Thick – 9.5mm UNF Stud – 22mm Long each end |
| IMH358 | Anti-vibration Mount | 51mm OD | 36mm Thick – 9.5mm UNF Stud – 22mm Long each end |
| IMH362 | Anti-vibration Mount | 75mm OD | 32mm Thick – 9.5mm UNF Stud – 22.2mm Long each end |
| IMH363 | Anti-vibration Mount | 75mm OD | 32mm Thick – 9.5mm UNF Stud – 22mm Long each end |

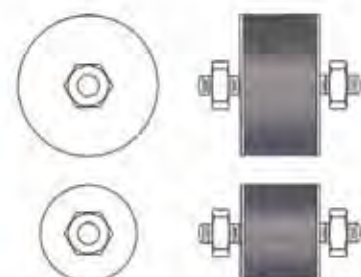

Channel Strips

COMPOUND - E.P.D.M. STANDARD COIL LENGTH: 20 METERS HARDNESS 80 SHORE A MAX OPERATING TEMPERATURE 120°C



| | | | | | | |
|---|---|---|--|---|---|---|
|  |  |  |  |  |  |  |
| C1 PCA001 26x6mm | C2 PCA002 4mm | C3 PCA003 6mm | C4 PCA004 5mm | C7 PCA007 4mm | C8 PCA008 5mm | C10 PCA010 2mm |
|  |  |  |  |  |  |  |
| C11 PCA011 17x7mm | C12 PCA012 19x9mm | C13 PCA013 3x21mm | C15 PCA015 4mm | C16 PCA016 5mm | C17 PCA017 15x6mm | C19 PCA019 2.5x3.8mm |
|  |  |  |  |  |  |  |
| C24 PCA024 1mm | C27 PCA027 1mm | C28 PCA028 5x13mm | C30 PCA030 39x5.5mm | C32 PCA032 3mm | C35 PCA035 14x14mm | C43 PCA043 2mm |
|  |  |  |  |  |  | |
| C44 PCA044 1mm | C49 PCA049 1mm | C50 PCA050 2mm | C51 PCA051 1.5mm | C52 PCA052 1.3mm | C55 PCA055 2.5x23.5mm | |
| STANDARD COACH STRIPS | | | | | | |
|  | | |  | | | |
| PKA073 Mercedes style still strip Compound: EPDM Std Coil Length – 20 metres | | | PKA107 Coach Waist Trim Compound: EPDM Std Coil Length-25 metres | | | |

Weather Strips

COMPOUND - NATURAL RUBBER - STANDARD COIL LENGTH:15 METERS

| | | |
|---|---|---|
|  |  |  |
| W2 PWA002 Panel 1.6mm Glass 4.8mm Filler 010 Radius 58mm | W3 PWA003 Panel 3.2mm Glass 6.4mm Filler 010 Radius 102mm | W4 PWA004 Panel 1.6mm Glass 6.4mm Filler 010 Radius 102mm |

| | | |
|---|---|---|
|  |  |  |
| W8 PWA008 Panel 6.4mm Glass 6.4mm Filler 010 Radius 64mm | W11 PWA011 Panel 1.6mm Glass 3.2mm Filler 000 Radius 51mm | W13 PWA013 Panel 6.4mm Glass 4.8mm Filler 010 Radius 64mm |

| | |
|--|--|
| SELF SEALING SYSTEM | FILLER STRIP |
|  |  |
| | PVC COMPOUND Std Coil Length 30M medium – PWF010 – Black PWF011 – White |

ALSO AVAILABLE

VERY SMALL

PWF000/PWF001 – B/W, STD COIL LENGTH 50M

SMALL


PWF005 – B, STD COIL LENGTH 30M

LARGE

PWF015 – B, STD COIL LENGTH 30M

GROMMETS ID x P x G

| | | | | | |
|--------|---------|-------------------|--------|---------|-------------------|
| IMG010 | Grommet | 3.9 x 7.9 x 1.6 | IMG080 | Grommet | 12.7 x 19 x 1.6 |
| IMG021 | Grommet | 4.8 x 7.4 x 1.6 | IMG067 | Grommet | 14.2 x 22.2 x 5.5 |
| IMG022 | Grommet | 4.8 x 7.6 x 1.6 | IMG090 | Grommet | 15.8 x 25.4 x 1.6 |
| IMG030 | Grommet | 6.4 x 11.1 x 1.6 | IMG070 | Grommet | 15.9 x 20.6 x 1.6 |
| IMG031 | Grommet | 6.4 x 11.1 x 3.2 | IMG130 | Grommet | 19 x 22.2 x 1.6 |
| IMG050 | Grommet | 6.4 x 14.2 x 1.6 | IMG131 | Grommet | 19 x 25.4 x 3.2 |
| IMG205 | Grommet | 7.9 x 12.7 x 1.6 | IMG140 | Grommet | 20.6 x 33.3 x 1.6 |
| IMG040 | Grommet | 9.5 x 12.7 x 1.6 | IMG120 | Grommet | 25.4 x 33.3 x 1.6 |
| IMG041 | Grommet | 9.5 x 12.7 x 3.2 | IMG180 | Grommet | 28.5 x 38.1 x 1.6 |
| IMG060 | Grommet | 9.5 x 19 x 1.6 | IMG160 | Grommet | 31.7 x 38.1 x 1.6 |
| IMG111 | Grommet | 11.1 x 15.8 x 1.6 | IMG150 | Grommet | 54 x 63.5 x 1.6 |
| IMG110 | Grommet | 11.1 x 17.4 x 1.6 | IMG170 | Grommet | 62 x 66.6 x 1.6 |
| IMG112 | Grommet | 11.1 x 17.4 x 4.8 | | | |



BODY PLUGS

| | | | | | |
|--------|--------------|--------|---------|------------|--------|
| | Panel | | | | |
| IMB301 | Body Plugs | 7.9mm | IMB306 | Body Plugs | 22.2mm |
| IMB302 | Body Plugs | 9.5mm | IMB307 | Body Plugs | 25.4mm |
| IMB303 | Body Plugs | 12.7mm | IMB308 | Body Plugs | 28.6mm |
| IMB304 | Body Plugs | 15.9mm | IMB309 | Body Plugs | 32mm |
| IMB305 | Body Plugs | 19.1mm | IMB3010 | Body Plugs | 38mm |




Standard Lid Rings

COMPOUND - NATURAL RUBBER - NITRILE - SILICONE

SKELLERUP LID RINGS are manufactured from high grade white rubber acceptable to the milk and beverage industries. They are designed for sealing manhole ports where a metal flange is used to mount the ring. Lid rings are manufactured in a selection of sizes to suit most tankers and vats.

CUSTOM MOULDED RINGS

Custom moulded rings are also available and can be manufactured to order. If the standard sizes (see right) don't suit your purposes, please contact us and we will be happy to discuss your project with you.

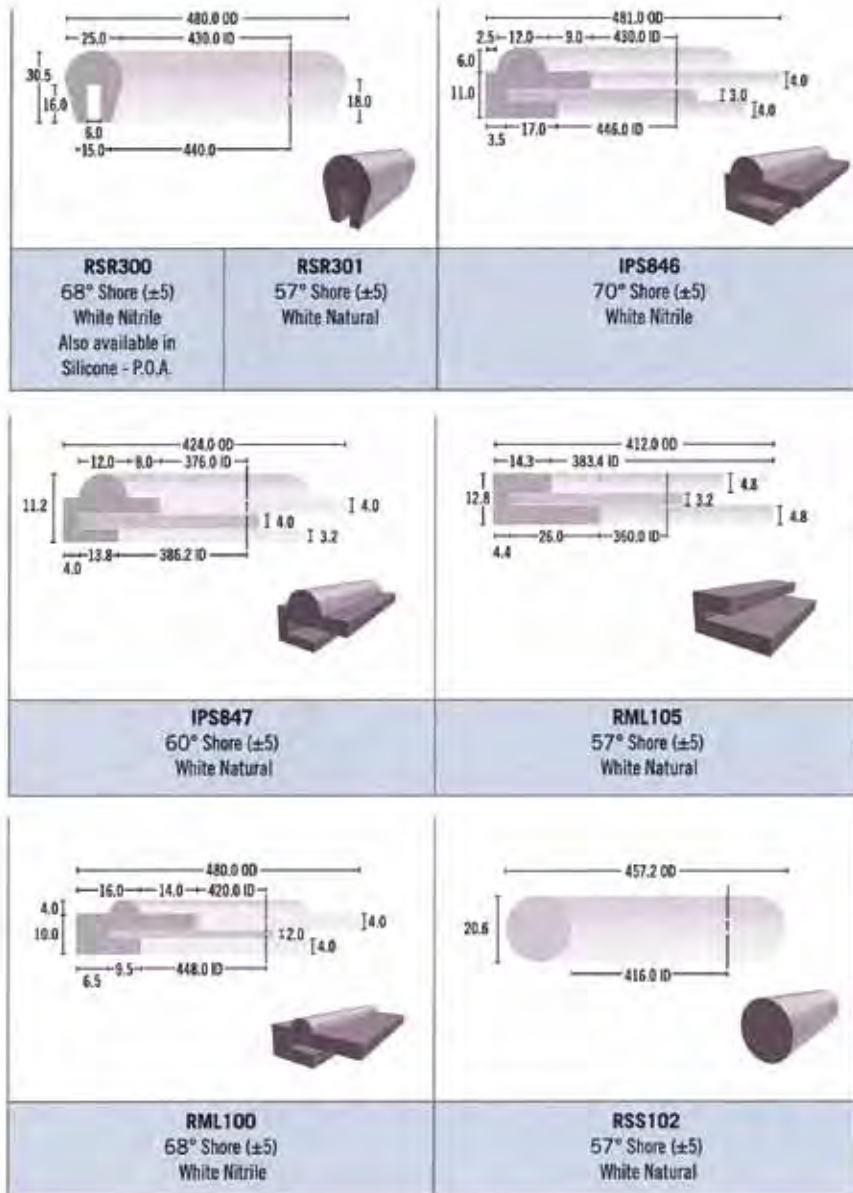

Barrier Cord

Barrier Cord is made from highly resilient natural rubber. Although this product was originally made for use by Racing Clubs, it is now used in a wide range of applications.



3.2



4.8



7.9



9.5



11.1



12.7



15.9



19.1



25.4

Solvent Tubing

Solvent Tubing is a product developed to give resistant to the most common solvents and fuels and also has good atmospheric ageing characteristics.



3.2 x 1.6



4.8 x 1.6



6.4 x 1.6



4.8 x 2.4




6.4 x 2.4




7.9 x 2.4




9.5 x 2.4




6.4 x 3.2



9.5 x 3.2



12.7 x 3.2



15.9 x 3.2



7.9 x 4.0



15.9 x 4.0





19.1 x 4.0



9.5 x 4.8

Docking Rubbers

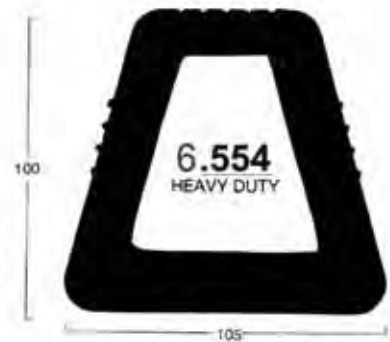


1 metre and 3 metre lengths available from stock.




Wheel Arch Flare-Rubber




6.444
Wheel arch flare. Side fitting. 20m coil.

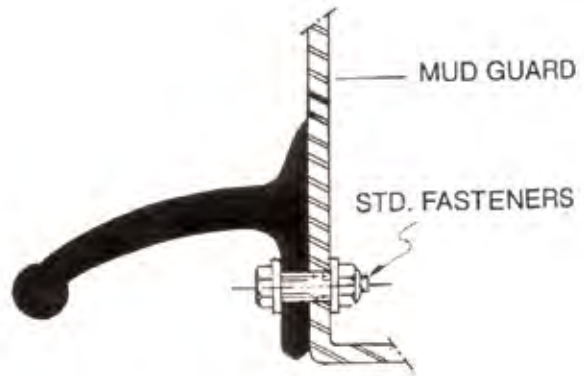


6.462
Wheel arch flare. Under fitting. 30m coil.

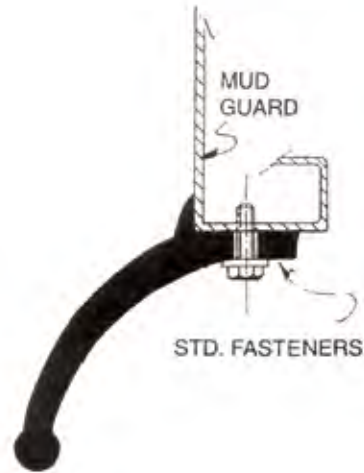


Tank Straps




6.582
Tank straps to suit 40mm straps oil and fuel resistant nitrile.



6.443
Tank straps to suit 50mm straps oil and fuel resistant nitrile.




6.581
Bracket straps to suit 50mm non oil resistant.




6.530
Bracket straps to suit 80mm straps oil and fuel resistant nitrile.

Pinchweld


COMPOUND - E.P.D.M. - RUBBER - SPONGE - AVAILABLE ON REQUEST




6.66-014




6.66-015




6.66-016



6.66-017




6.66-018




6.66-020




6.66-022




6.66-040



6.66-047




6.66-057



6.66-060



6.66-115



6.66-137



6.66-157



6.39-8831

Wheel Chocks

Ideal for cars trucks and trailers - At least one hole to attach rope or chain for security.



6.WC1468A 205L 105W 105H.



6.WC1467A 205L 120W 100H.



6.WC1086 250L 200W 160H.



6.WC2556A 260L 180W 210H.



6.WC4 150L 65W 100H.
6.WC6 270L 150W 152H.



6.WC3783 300L 300W 260H.

Rubber

"WORKING FOR YOU"

We offer Factory or Onsite lining work which includes:


TANKS
PIPE SPOOLS
VALVES **CHUTES**
HOPPERS
PUMPS
PULLEYS
ROADSWEEPERS
HYDROCYCLONES




Tank lining.



Flexible bends.



Pipe and fitting linir gs

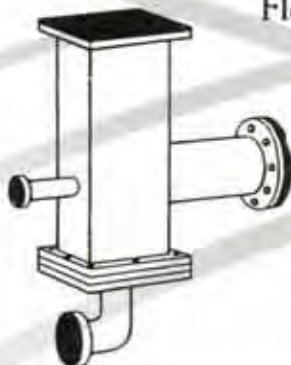

Take off box lining with flushing connection.



Pulley lagging and anti build up curtains.

Fabricated Rubber Seals and Components

Linatex Fabrications - Seals, Sleeves, Connectors, Components



These examples have been fabricated to customers' instructions or designed to their requirements by Flexitech engineers. Each uses to the full one or more of the characteristic advantages of Linatex

